
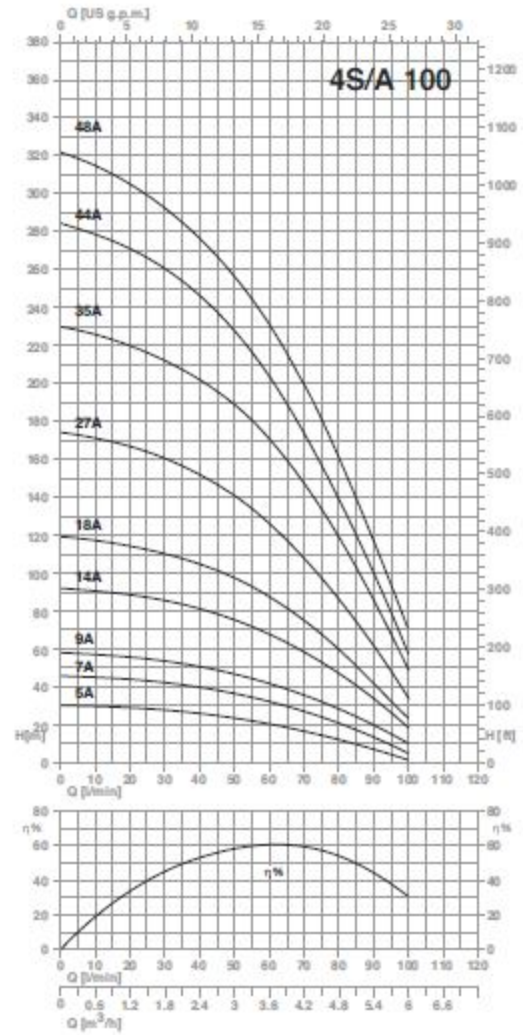


TYPE	P2		Q (m <sup>3</sup> /h - l/min)						DNM	Lenght	Waight
			0	0,3	0,6	0,9	1,2	1,5			
			0	5	10	15	20	25			
			H (m)								
	SHI	kW							mm	Kg	
4S 25/10A	0,5	0,37	67	63	55	46	33	18	1" 1/4	324	3,3
4S 25/13A	0,5	0,37	86	78	70	56	42	23		377	3,7
4S 25/19A	0,75	0,55	126	118	105	86	60	30		481	4,7
4S 25/26A	1,0	0,75	173	160	141	117	81	39		642	5,8
4S 25/38A	1,5	1,1	253	234	208	169	117	52		864	8,2



TYPE	P2		Q (m <sup>3</sup> /h - l/min)						DNM	Lenght	Waight
			0	1,2	1,5	1,8	2,4	3			
			0	20	25	30	40	50			
			H (m)								
	SHI	kW							mm	Kg	
4S 50/5A	0,5	0,37	33	30	28	26	20	13	1" 1/4	245	2,6
4S 50/7A	0,5	0,37	47	42	40	36	29	19		280	2,9
4S 50/10A	0,75	0,55	67	60	56	52	41	27		332	3,5
4S 50/14A	1,0	0,75	93	83	79	73	57	37		402	4,2
4S 50/20A	1,5	1,1	133	119	113	104	82	53		507	5,3
4S 50/28A	2	1,5	187	167	158	146	115	74		680	7,1
4S 50/40A	3	2,2	267	238	226	208	164	106		914	10,1
4S 50/52A	4	3	347	309	294	271	213	138		1120	12,2

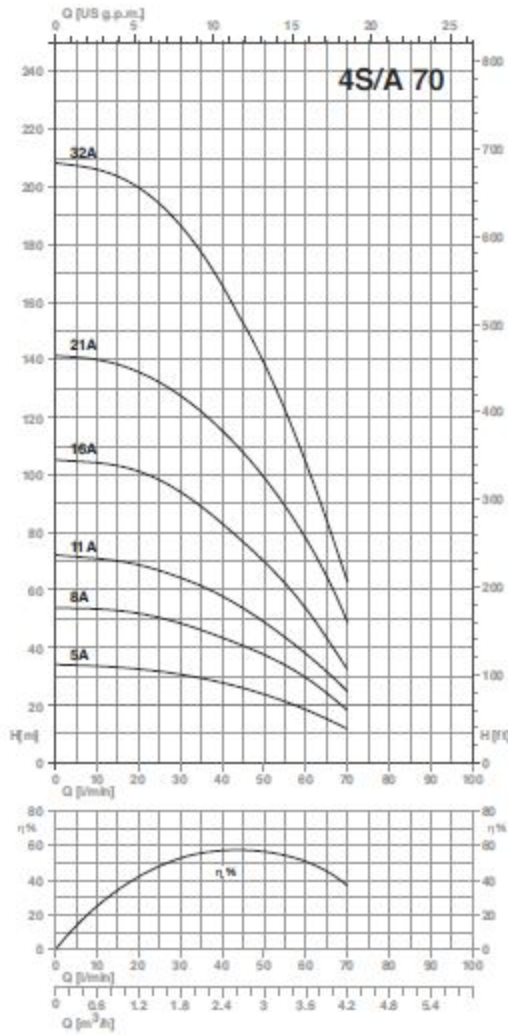

TYPE	P <sub>2</sub>		Q (m³/h - l/min)										DNM	Length	Weight
			0	1,2	1,5	1,8	2,1	2,4	2,7	3,0	3,6	4,2			
	0	20	25	30	35	40	45	50	60	70					
	GHP	ICW	H (m)											mm	Kg
4S 70/5A	0,5	0,37	34	32	31	30	29	28	26	24	19	13	1" 1/4	236	2,5
4S 70/8A	0,75	0,55	54	51	50	49	46	43	41	38	30	19		289	2,9
4S 70/11A	1,0	0,75	72	68	66	64	61	58	54	49	38	26		342	3,4
4S 70/16A	1,5	1,1	106	101	98	95	89	83	77	70	54	33		430	4,2
4S 70/21A	2,0	1,5	142	135	132	127	122	115	108	100	79	49		519	5,0
4S 70/32A	3,0	2,2	208	200	194	187	177	165	152	138	104	62		749	7,1



TYPE	P <sub>2</sub>		Q (m³/h - l/min)												DNM	Length	Weight
			0	1,5	1,8	2,1	2,4	2,7	3,0	3,6	4,2	4,8	5,4	6,0			
	0	25	30	35	40	45	50	60	70	80	90	100					
	GHP	ICW	H (m)													mm	Kg
4S 100/5A	0,5	0,37	33	29	28	27	26	25	24	21	18	13	8	3	1" 1/4	257	2,7
4S 100/7A	0,75	0,55	46	43	42	41	40	39	37	33	28	21	13	7		301	3,0
4S 100/9A	1,0	0,75	59	55	54	52	51	49	47	43	37	28	20	10		344	3,3
4S 100/14A	1,5	1,1	93	87	86	83	81	79	76	68	58	47	33	20		452	4,1
4S 100/18A	2,0	1,5	120	113	111	108	105	102	98	88	75	60	42	25		538	4,7
4S 100/27A	3,0	2,2	175	164	161	157	152	147	141	127	109	87	61	35		767	6,2
4S 100/35A	4,0	3,0	231	217	212	208	202	196	189	170	149	120	87	50		934	7,9
4S 100/44A	5,0	3,7	285	266	260	254	248	238	229	203	172	139	100	59		1128	9,3
4S 100/48A	5,5	4,0	322	299	292	285	276	267	256	231	199	160	118	70		1253	9,9



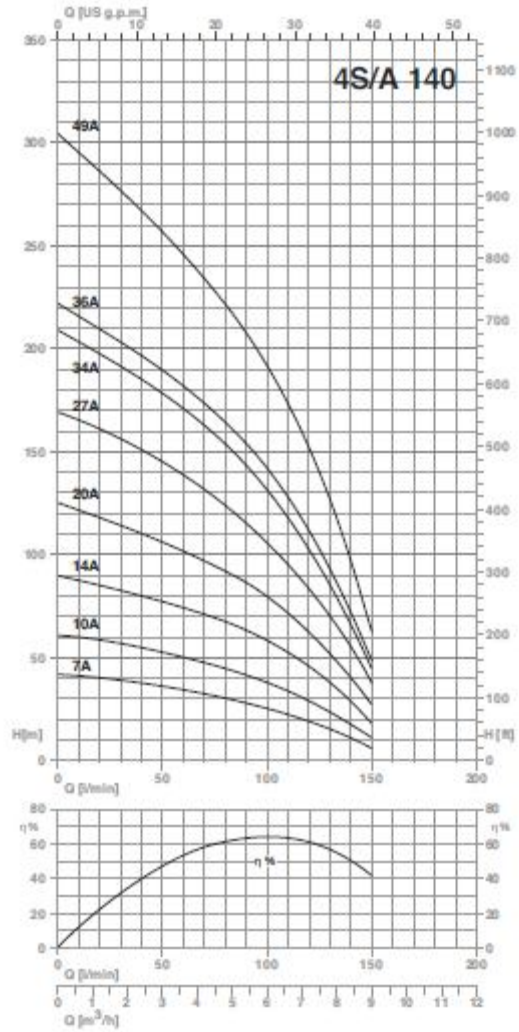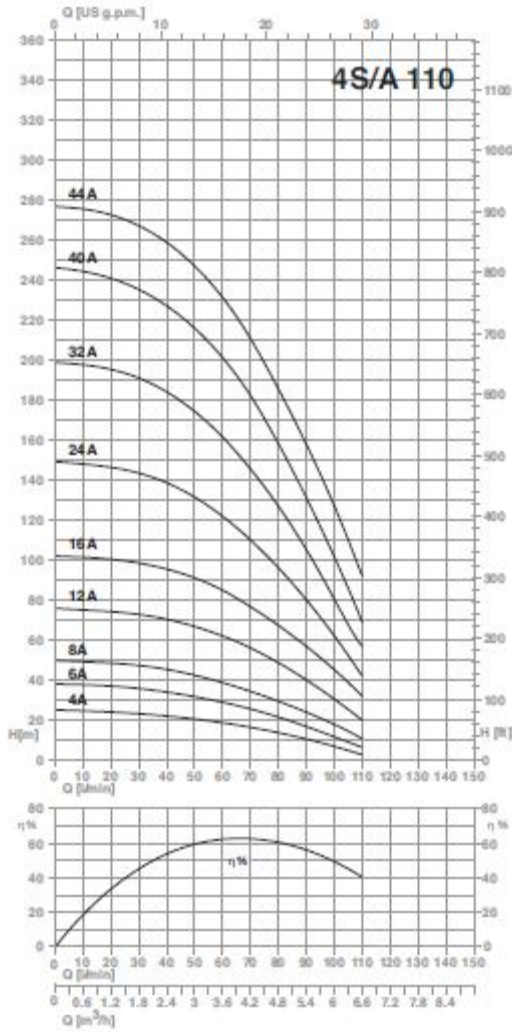


TYPE	P <sub>2</sub>		Q (m <sup>3</sup> /h - l/min)										DNM	Lenght	Weight
			0	2,1	2,4	2,7	3,0	3,6	4,2	4,8	5,4	6,0			
	(HP)	(kW)	0	35	40	45	50	60	70	80	90	100			
4S 110/4A	0,5	0,37	26	23	22	22	21	19	17	14	11	7	1" 1/4	247	2,4
4S 110/6A	0,75	0,55	28	26	25	23	22	20	18	15	12	296		2,2	
4S 110/8A	1,0	0,75	51	47	46	44	43	39	35	30	24	345		3,3	
4S 110/12A	1,5	1,1	77	72	71	69	68	63	57	49	41	433		4,1	
4S 110/16A	2,0	1,5	102	98	96	94	92	86	77	68	57	542		5,0	
4S 110/24A	3,0	2,2	151	142	139	136	132	122	111	97	80	777		6,6	
4S 110/32A	4,0	3,0	203	188	185	180	175	162	146	127	105	965		8,7	
4S 110/40A	5,0	3,7	253	232	227	222	216	202	182	159	131	1160		10,4	
4S 110/44A	5,5	4,0	278	265	260	254	247	230	210	187	159	1296		11,2	

TYPE	P <sub>2</sub>		Q (m <sup>3</sup> /h - l/min)								DNM	Lenght	Weight	
			0	3,0	3,6	4,2	4,8	5,4	6,0	7,2				8,4
	(HP)	(kW)	0	50	60	70	80	90	100	120				140
4S 140/7A	1,0	0,75	42	36	34	32	30	28	25	19	11	2"	390	3,7
4S 140/10A	1,5	1,1	62	53	51	48	45	41	38	29	18		483	4,6
4S 140/14A	2,0	1,5	90	77	74	71	68	63	59	46	28		607	5,7
4S 140/20A	3,0	2,2	125	107	102	97	92	86	80	62	40		831	7,5
4S 140/27A	4,0	3,0	169	145	139	131	123	115	107	84	55		1048	9,6
4S 140/34A	5,0	3,7	208	178	170	162	153	143	132	103	66		1257	11,6
4S 140/36A	5,5	4,0	221	190	181	173	164	154	143	112	72		1318	12,2
4S 140/49A	7,5	5,5	302	257	246	234	222	209	193	151	96		1802	15,9

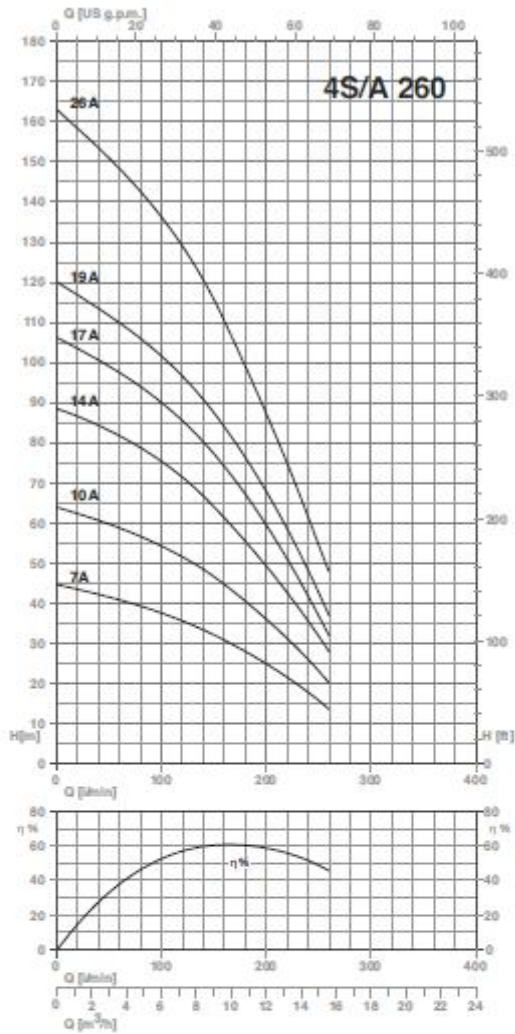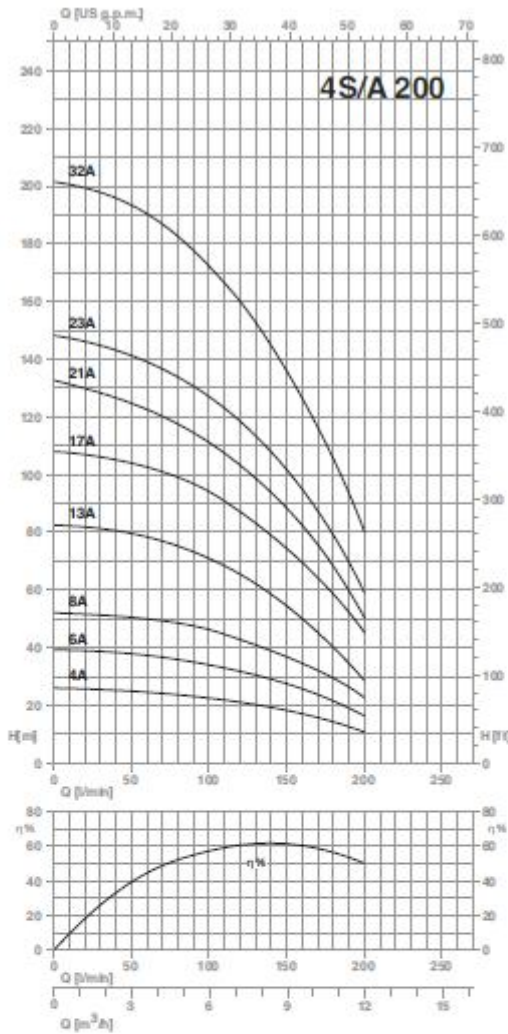

TYPE	P <sub>2</sub>		Q (m <sup>3</sup> /h - l/min)										DNM	Length	Weight
			0	4,8	5,4	6,0	7,2	8,4	9,6	10,8	12				
			0	80	90	100	120	140	160	180	200				
		H (m)											mm	Kg	
4S 200/4A	1,0	0,75	26	24	23	22	21	19	17	15	12	2"	294	2,8	
4S 200/6A	1,5	1,1	39	36	35	34	32	29	26	22	17		356	3,4	
4S 200/8A	2,0	1,5	52	48	47	46	43	39	35	29	24		418	4,0	
4S 200/13A	3,0	2,2	82	75	73	71	66	59	50	40	30		573	5,5	
4S 200/17A	4,0	3,0	108	98	96	94	87	79	70	58	46		697	6,6	
4S 200/21A	5,0	3,7	132	117	114	111	103	93	82	68	52		859	7,8	
4S 200/23A	5,5	4,0	148	134	131	127	118	108	95	79	60		921	8,4	
4S 200/32A	7,5	5,5	202	182	178	172	160	143	125	105	80	1238	11,0		

TYPE	P <sub>2</sub>		Q (m <sup>3</sup> /h - l/min)										DNM	Length	Weight
			0	6,0	7,2	8,4	9,6	10,8	12	13	14,4	16			
			0	100	120	140	160	180	200	220	240	260			
		H (m)											mm	Kg	
4S 260/7A	2,0	1,5	45	37	36	33	31	28	25	22	18	14	2"	534	5,3
4S 260/10A	3,0	2,2	64	54	52	48	44	41	36	32	26	20		690	6,7
4S 260/14A	4,0	3,0	89	76	72	67	62	56	49	43	35	28		989	8,6
4S 260/17A	5,0	3,7	107	90	86	80	74	67	59	51	42	32		1092	10,1
4S 260/19A	5,5	4,0	120	102	97	91	89	76	68	58	48	37		1195	11,0
4S 260/26A	7,5	5,5	163	136	129	120	111	100	87	75	61	48		1559	14,3

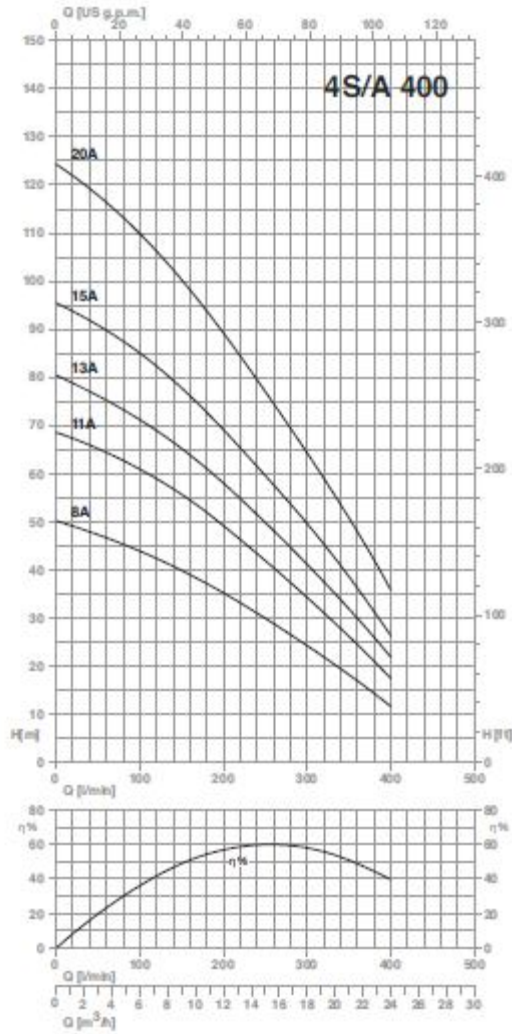

TYPE	P <sub>2</sub>		Q (m <sup>3</sup> /h - l/min)																DNM	Lenght	Weight
			0	8,4	9,6	10,8	12	13	14,4	16	17	18	19	20	22	23	24				
	0	140	160	180	200	220	240	260	280	300	320	340	360	380	400						
		H (m)																			
		(HP)	(KW)																		
4S 400/8A	3,0	2,2	51	41	39	37	35	33	31	29	27	24	22	20	17	14	12	2"	676	6,3	
4S 400/11A	4,0	3,0	70	57	54	52	49	47	44	41	38	34	31	28	24	21	18		880	8,1	
4S 400/13A	5,0	3,7	81	67	64	61	58	55	52	48	45	41	38	34	30	26	22		1013	9,3	
4S 400/15A	5,5	4,0	97	79	76	73	68	66	63	58	54	50	46	41	36	32	27		1149	10,5	
4S 400/20A	7,5	5,5	125	102	98	94	89	84	79	74	70	65	60	54	48	43	37		1489	13,5	